




AU360

SLIDING DOOR CATALOGUE


Automatico

PRODUCT DETAILS

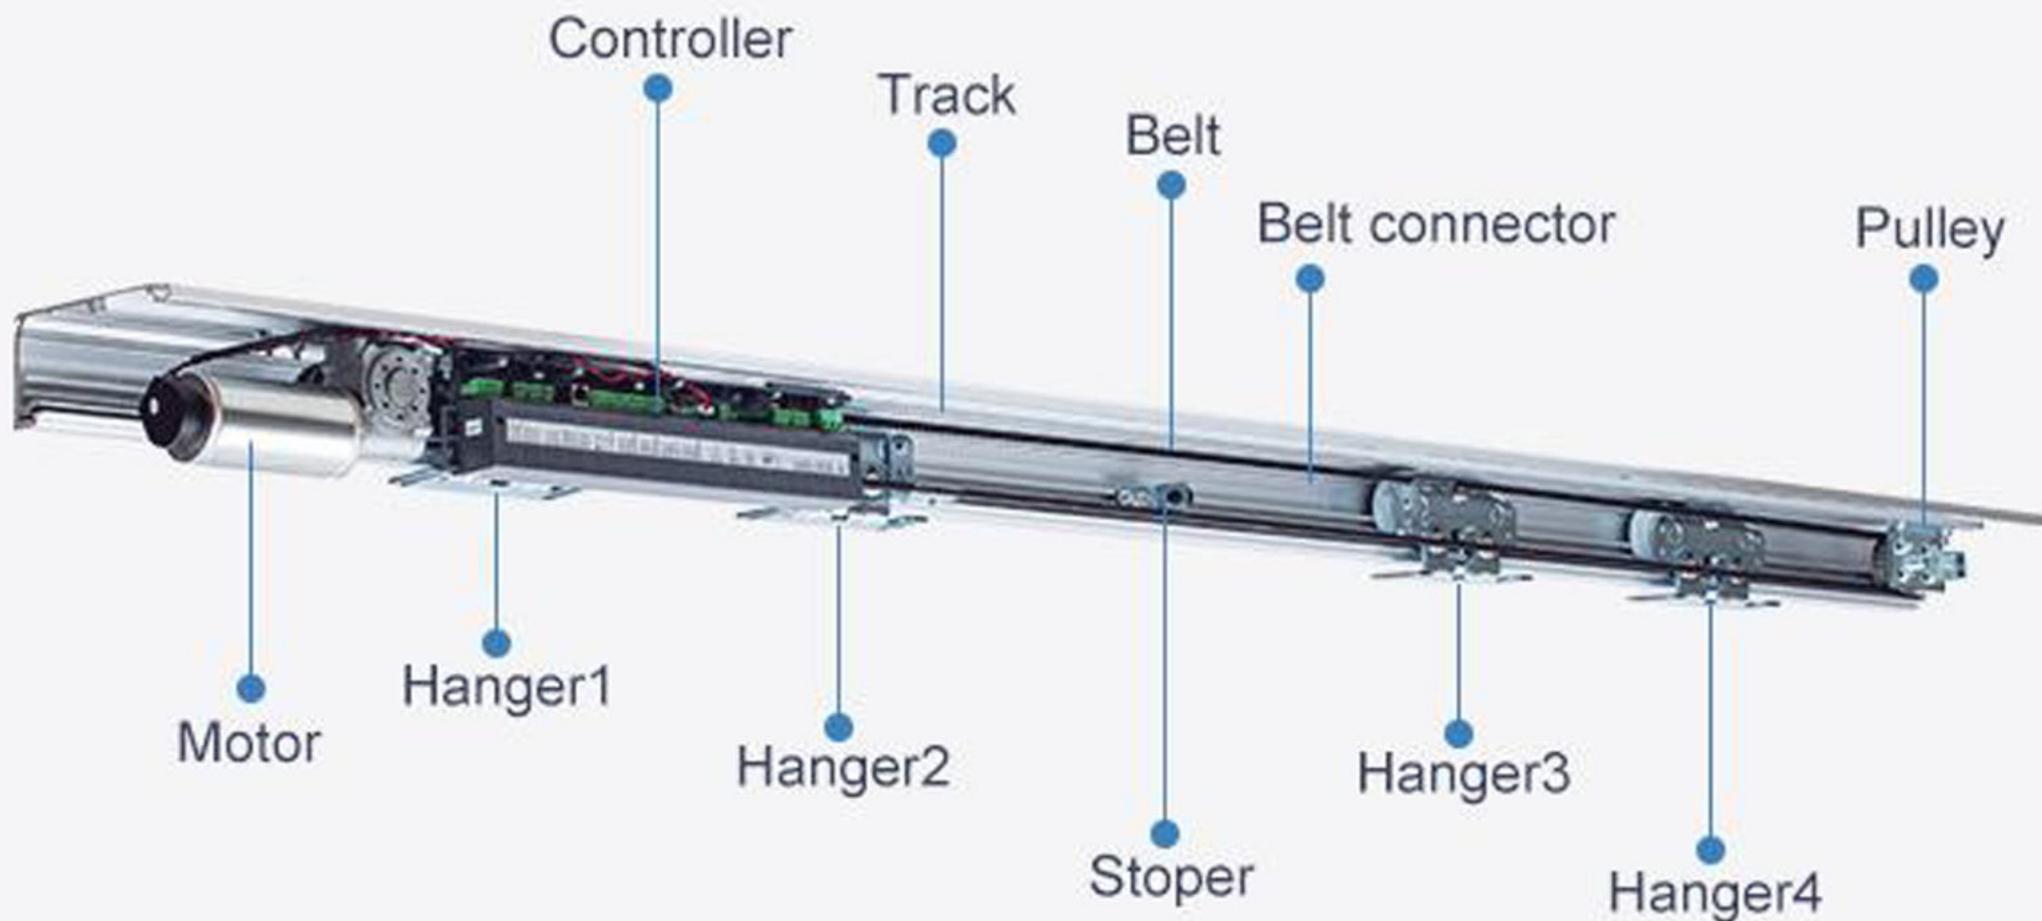

ABOUT Controller...

1. Built - in Battery charger 27v
2. Auto reverse force when opening
3. AU360 web (selector & adjuster)

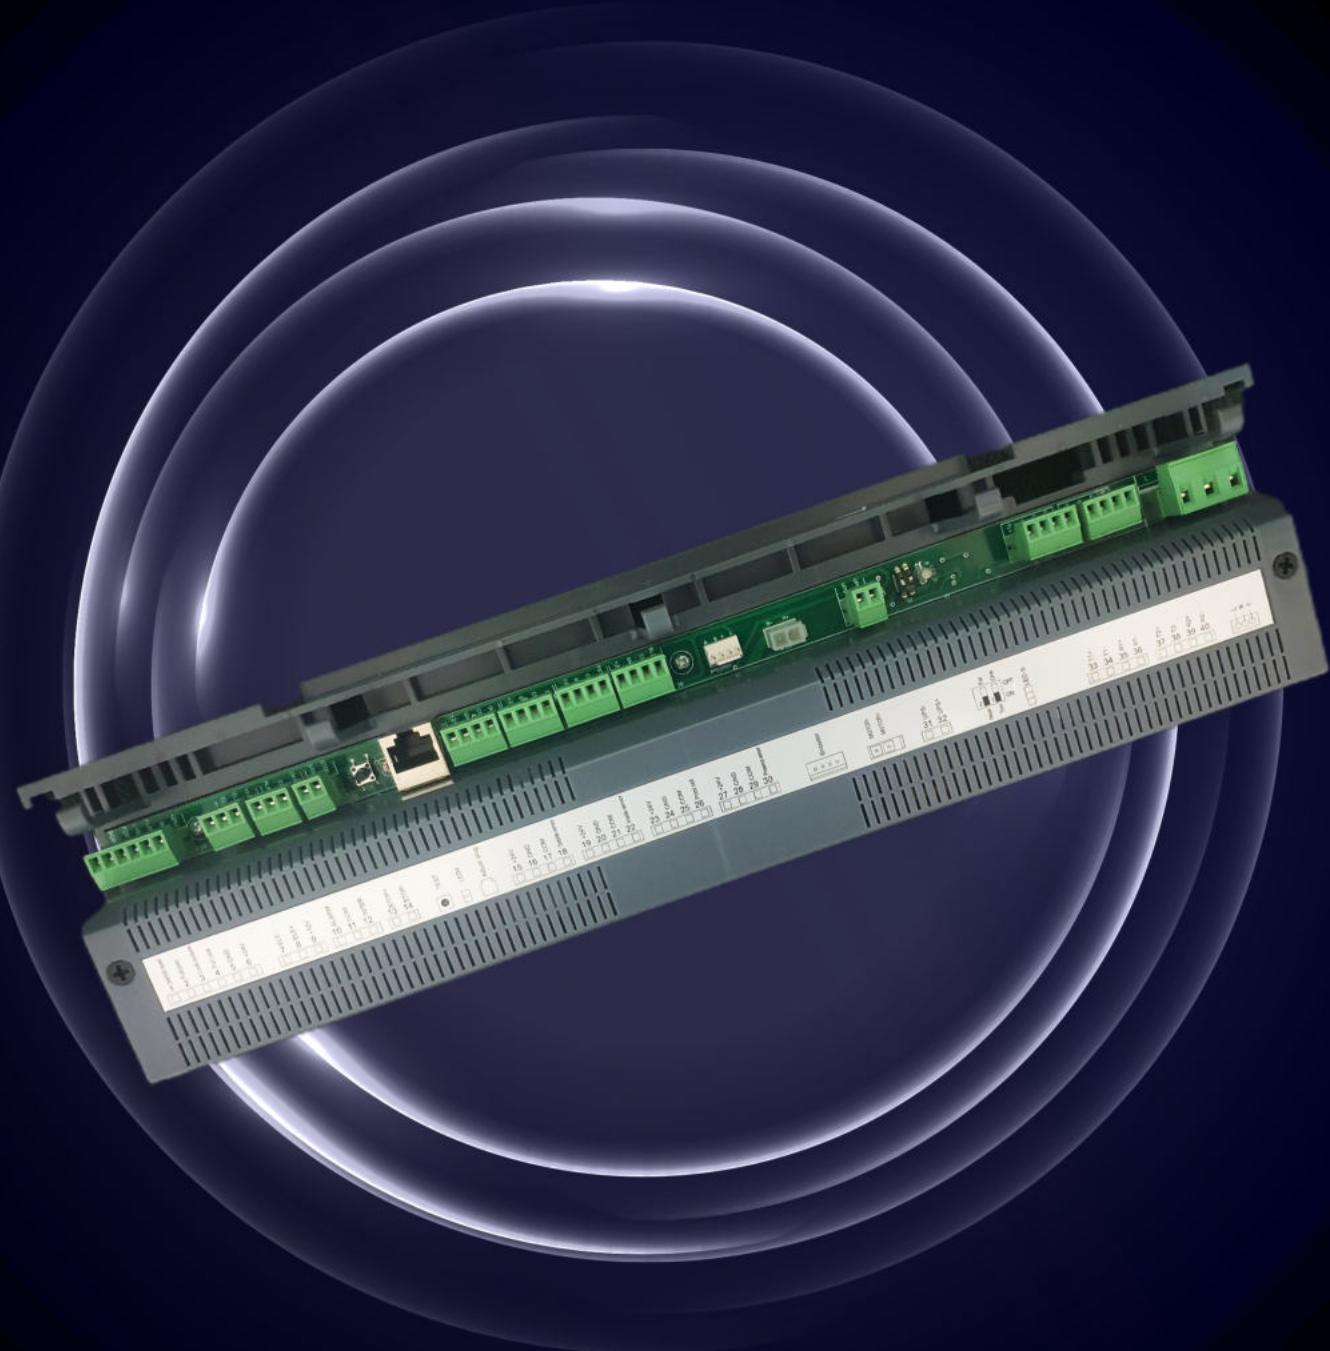

DATA ADJUSTER



CODE DATE



Data Setting

Code Setting

Production Data

Working Time



RESET



ERROR

Battery usage

Data reset

Re-learning
travel distance

Error warning



- Opening speed
- Closing speed
- Braking speed when opening
- Braking speed when closing
- Braking distance when opening

- Right side screen monitored
- Working times

dunkermotoren

FASTER MORE EFFICIENT

100w Brush Motor

Speed **3600** RPM\min

Low Noise Less Than 45dBA



dunkermotoren
Motor

ABOUT MODEL




AU3600

Motor speed	3600 rpm
Adjust Method	AU360web \ with 25 parameters
Learning Method	Controller + AU360
Adjust Method	25 Parameters on AU360
Setting work cycle	Memory work cycle (the first installation should be reset)
Half open	Patial open (20%-80% adjustable)
Emergency stop	Yes ,can be used for breakout door
Lock signal	Auto lock / lock by signal
Mode selection	Auto \Full open Half open \ lock \Exit only\manual Exit only
Lock Mode	Fail safe \Fail secure
Work times	Adjustable (unlimited \100,00times \10,00times)

ABOUT TRACK

- **AU360 track fitted in narrow door lintel.**
- **AU360 cover will be together with brush to keep the dust out from rail.**
- **Rubber strip less noise.**
- **The hanger can pass through behind the motor and controller to ensure the widest opening size.**

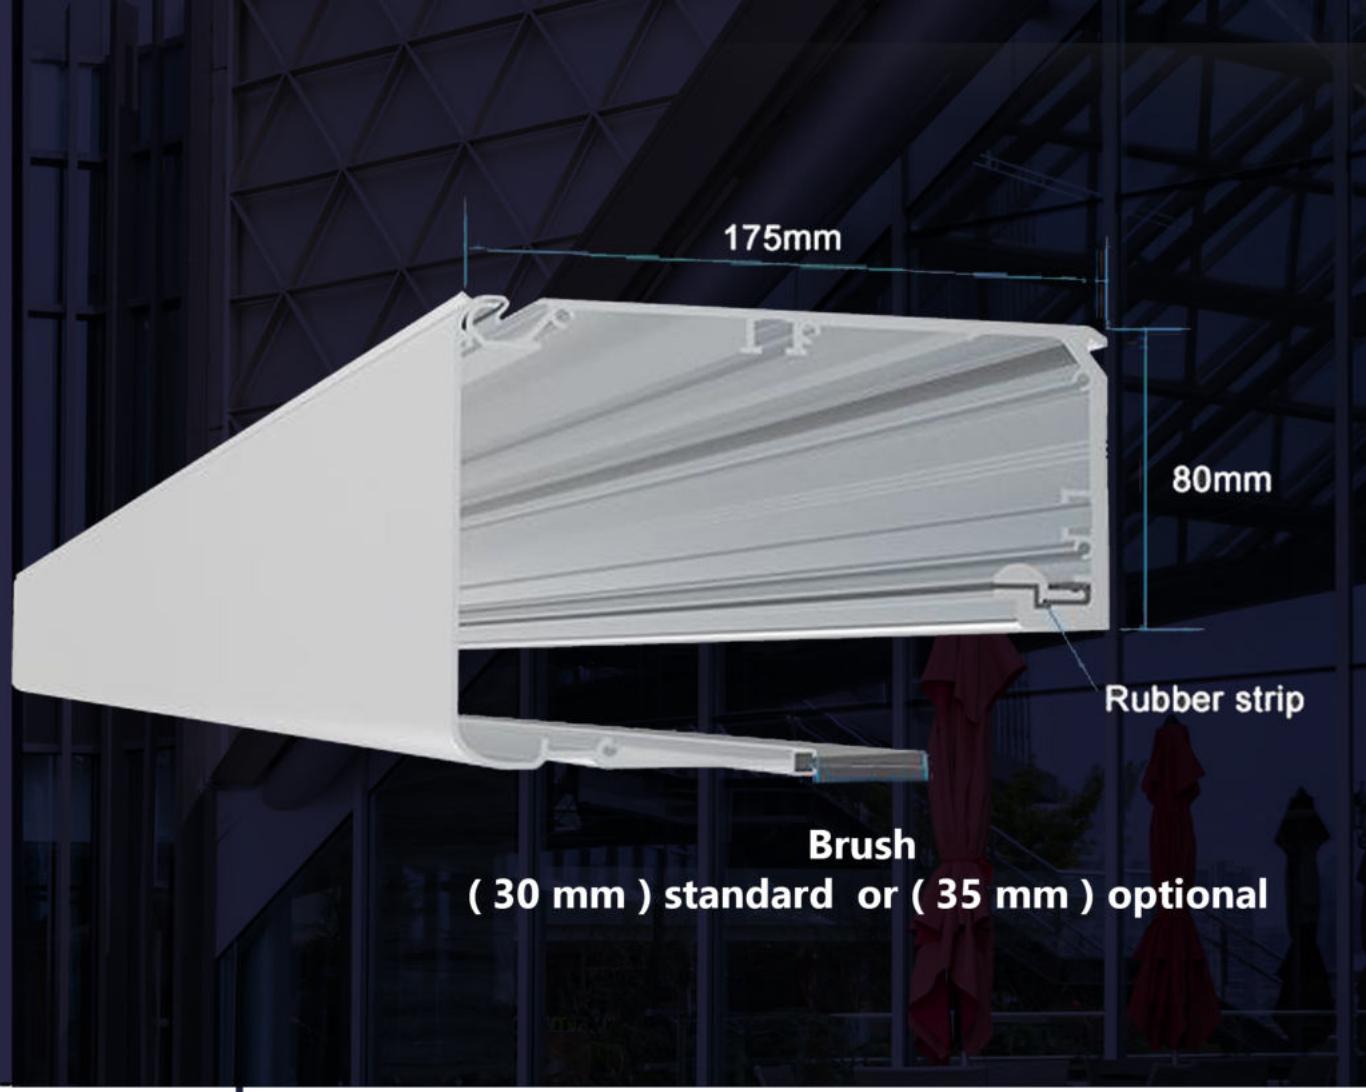

The hanger can pass through under the motor




TRACK AU360

The hanger can't pass through under the motor



TRACK ST150

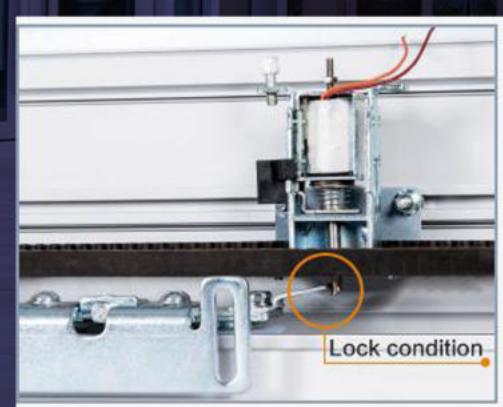

**The hanger lock suited for AU360
operator locking
Fail safe or Fail secure optional**

(Optional)



Microwave Sensor



Combined sensor



Remote



Touchless sensor



Access Keypad

TECHNICAL DATA

AU360

Door leaf mode	Single - opening	Double - opening
Door leaf weight	Max 220kg	Max 2*180kg (360)
Door leaf width	DW= 500 -1500mm	DW= 500 -1500mm
Voltage	AC100-250V 50-60HZ	
Opening speed	17-75cm\s (adjstable)	
Closing speed	17-60cm\s (adjstable)	
Opening time	0.60second (adjustable)	
Manual open force	95 - 100N	
Motor	24V 100W 3600rpm	
Operating temperature	-10 °c ~+70 °c	